




## Elevating Educational Spaces Through Design

PRODUCT APPLICATIONS

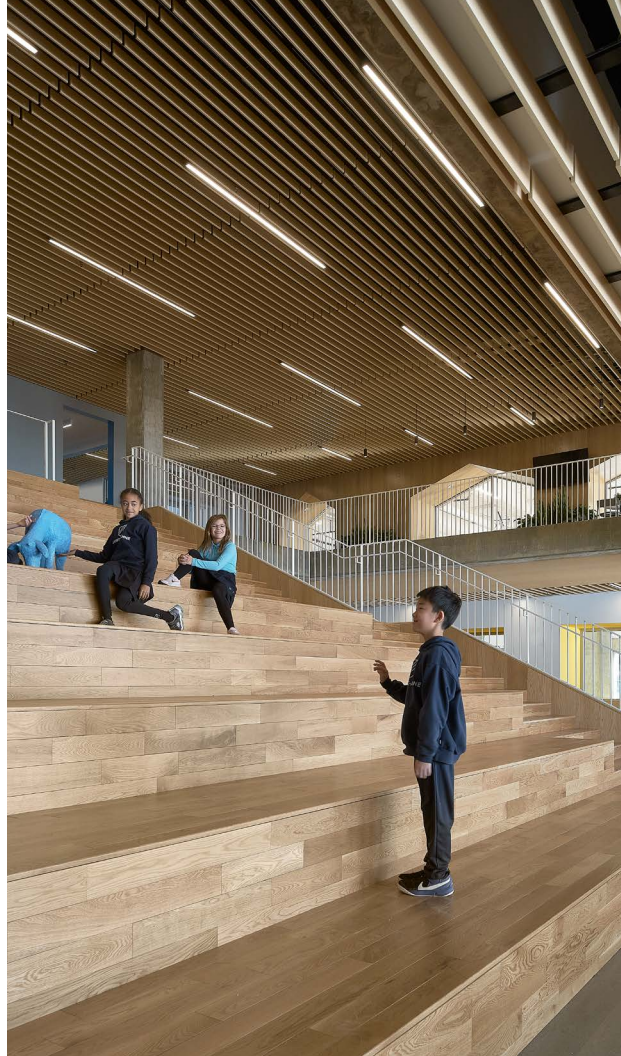

## THE ADVANTAGES OF LED LIGHTING IN **SCHOOLS**

Lighting plays a significant role in shaping the atmosphere and functionality of schools. LED lighting has emerged as a popular choice for educational institutions due to its energy efficiency, versatility, and positive impact on student performance. Here are the key benefits:



### Health & Wellbeing

- ✓ **Enhance cognitive** performance through customizable lighting options.
- ✓ **Utilize flexible lighting** systems to meet the specific visual needs of various tasks, supporting diverse learning environments.
- ✓ **Enhance circadian rhythm** regulation with our spectrally-tuned LED lighting solutions.



### Productive Learning

- ✓ **Our luminaires** contribute to productive learning environments.
- ✓ **Better moods** and less eye strain.
- ✓ **Exceptional glare control**, making it the perfect fit over the white boards.



### Environmentally Safe

- ✓ **Mercury-free** and 100% recyclable.
- ✓ **Optimize energy** consumption and carbon footprint
- ✓ **Reduce utility bills** and maintenance costs.



## SCHOOL APPLICATIONS

### Energy-Efficient, Durable, and Low Maintenance

Educational environments, from classrooms to athletic spaces, demand lighting solutions that prioritize energy efficiency, durability, and ease of maintenance, all while offering versatile design options.

Our luminaires are designed to meet these needs, enhancing productivity and creating optimal lighting in a wide range of settings, including:

- Classrooms
- Gymnasiums
- Cafeterias
- Stairwells
- Corridors
- Academic offices
- Exterior walls



## GYMNASIUMS

## RECREATIVE AREAS



## HALLWAYS



## LOCKER ROOMS



## CLASSROOMS

## STAIRWELLS



# CLASSROOMS



## PROW | Recessed Luminaire



[Spec Sheet & IES Files](#)

### FEATURES

Size:	12x48"   24x24"   24x48"
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	T-Bar ceilings
Housing:	Precision die-formed 20-gauge C.R.S.

### FINISH OPTIONS



### CCT OPTIONS



## VT2 /VT4 | Linear Luminaire for T-Bar




[Spec Sheet & IES Files](#)

### FEATURES

Nominal Length:	2ft   3ft   4ft   5ft   6ft   7ft   8ft
LED CRI:	80 CRI   90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Recessed
Lens:	Impact resistant polycarbonate


### FINISH OPTIONS



### LED OPTIONS



## VS2 / VS4 | Surface Linear Luminaire

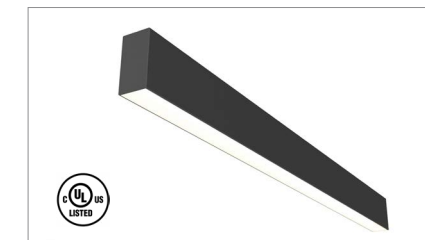


[Spec Sheet & IES Files](#)

### FEATURES

Nominal Length:	2ft   4ft   6ft   8ft
LED CRI:	80 CRI   90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Surface
Housing:	Precision die-formed 18-gauge C.R.S.

### FINISH OPTIONS



### CCT OPTIONS





## RAPP-P | Architectural Luminaire



[Spec Sheet & IES Files](#)

### FEATURES

Size:	2ft   4ft   6ft   8ft
Depth:	4" or 6"
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Pendant

### FINISH OPTIONS



### CCT OPTIONS



## RAPP-S | Architectural Luminaire



[Spec Sheet & IES Files](#)

### FEATURES

Size:	2ft   4ft   6ft   8ft
Depth:	4" or 6"
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Surface


### FINISH OPTIONS



### CCT OPTIONS



## RAPP-AM | Architectural Luminaire

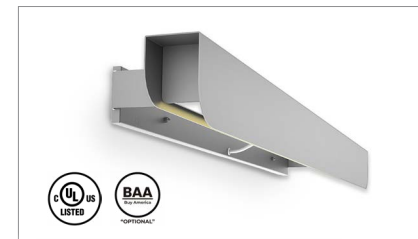

[Spec Sheet & IES Files](#)

### FEATURES

Size:	2ft   4ft   6ft   8ft
Depth:	4"
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Wallmount

### FINISH OPTIONS



### CCT OPTIONS






## CAFETERIA & KITCHEN



### VP2 / VP4 | Pendant Linear Luminaire

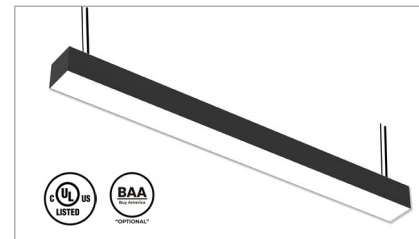


[Spec Sheet & IES Files](#)

#### FEATURES

Nominal Length:	2ft   3ft   4ft   5ft   6ft   7ft   8ft
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Pendant
Housing:	Precision die-formed 18-gauge C.R.S.


#### FINISH OPTIONS



#### CCT OPTIONS



### MRG2 | Recessed Luminaire

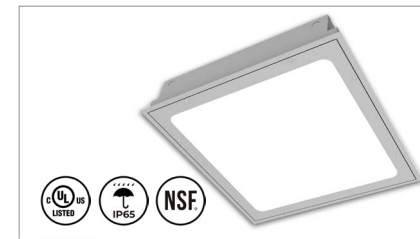


[Spec Sheet & IES Files](#)

#### FEATURES

Size:	12x48"   24x24"   24x48"
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	T-Bar ceilings
Housing:	Precision die-formed 20-gauge C.R.S.

#### FINISH OPTIONS



#### CCT OPTIONS



### PROW | Recessed Luminaire




[Spec Sheet & IES Files](#)

#### FEATURES

Size:	12x48"   24x24"   24x48"
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	T-Bar ceilings
Housing:	Precision die-formed 20-gauge C.R.S.

#### FINISH OPTIONS



#### CCT OPTIONS





## LABORATORIES

**PRCL** | Recessed Luminaire 1x2 | 1x4 | 2x2 | 2x4



[Spec Sheet & IES Files](#)


### FEATURES

Size:	1x2   1x4   2x2   2x4
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Recessed
Lens:	A variety of lenses are available

### FINISH OPTIONS



### LED OPTIONS



## LOCKER ROOMS

**PUCSW / PUCSA** | Wraparound luminaire




[Spec Sheet & IES Files](#)

### FEATURES

Nominal Length:	2ft   4ft   6ft   8ft
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Wallmount, Pendant, Surface
IP Grade:	IP65

### FINISH OPTIONS



### CCT OPTIONS





## HALLWAYS

### VR2 / VR4 | Recessed Linear Luminaire




[Spec Sheet & IES Files](#)

#### FEATURES

Nominal Length:	2ft   4ft   6ft   8ft
LED CRI:	80 CRI   90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Recessed
Lens:	Impact resistant polycarbonate

#### FINISH OPTIONS



#### CCT OPTIONS



## SHOWERS

### MDA4 / MDA6 | Sealed Downlight



[Spec Sheet & IES Files](#)

#### FEATURES

Aperture:	4"   6"
LED CRI:	80 CRI   90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Recessed
IP Grade:	IP65

#### FINISH OPTIONS



#### CCT OPTIONS






# GYMNASIUMS



## LGL | Linear Impact-Resistant

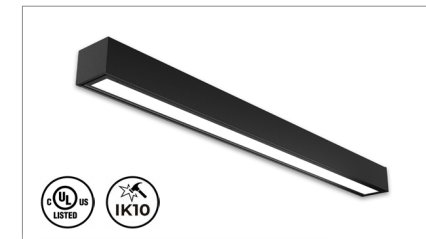


[Spec Sheet & IES Files](#)

### FEATURES

Nominal Length:	4ft   6ft   8ft
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Wallmount, Pendant, Surface
IP Grade:	IP54 Standard

### FINISH OPTIONS



### CCT OPTIONS



## PUHG | High Bay impact resistant



[Spec Sheet & IES Files](#)


### FEATURES

Nominal Length:	4ft   8ft
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Pendant or Surface
IP Grade:	IP54 Standard

### FINISH OPTIONS



### CCT OPTIONS



## PENE | LED High Bay




[Spec Sheet & IES Files](#)

### FEATURES


Nominal Length:	2ft   4ft
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Pendant
IP Grade:	IP54 Standard

### FINISH OPTIONS




### CCT OPTIONS



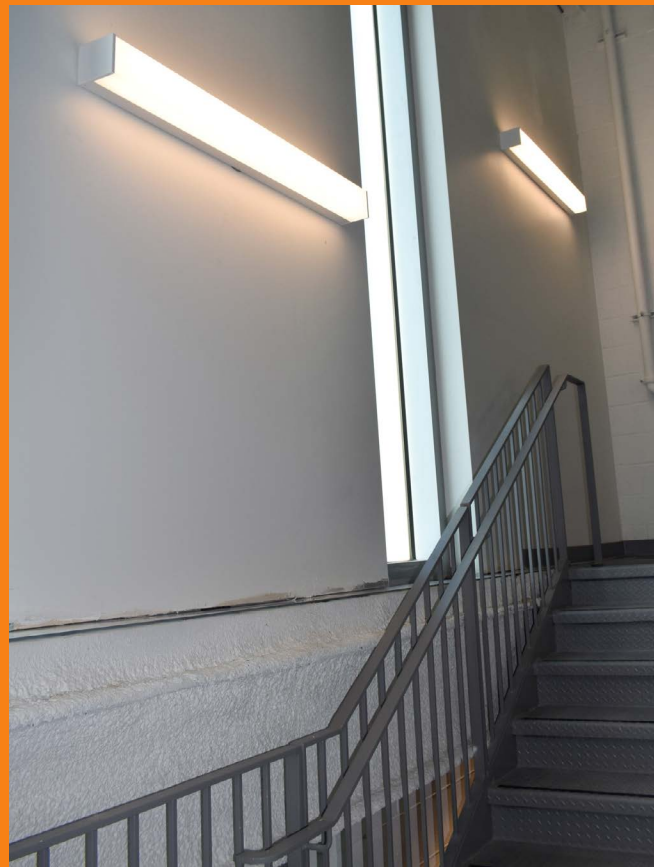

## PUCO | Wraparound luminaire

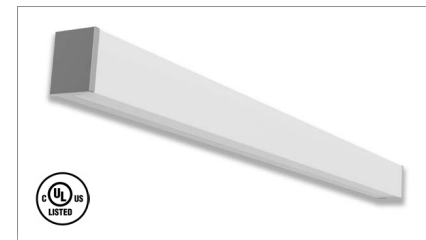


[Spec Sheet & IES Files](#)

### FEATURES

Nominal Length:	2ft   3ft   4ft   8ft
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Wallmount, Pendant, Surface
IP Grade:	IP54 Standard

### FINISH OPTIONS



### CCT OPTIONS



## PUCSA | Wraparound luminaire




[Spec Sheet & IES Files](#)

### FEATURES

Nominal Length:	2ft   4ft   6ft   8ft
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Wallmount, Pendant, Surface
IP Grade:	IP54 Standard

### FINISH OPTIONS



### CCT OPTIONS



# STAIRWELLS

## AC700 | Vandal-Resistant Luminaire




[Spec Sheet & IES Files](#)

### FEATURES

Lumens:	2,000   3,000   4,000   5,000
LED CRI:	80 CRI or 90 CRI
Input Voltage:	120-277V or 347V
Mounting:	Recessed
Face Guard:	Open   Cross   Eyelid

### HOUSING FINISHES



### CCT OPTIONS





[info@pacolighting.com](mailto:info@pacolighting.com) | [www.pacolighting.com](http://www.pacolighting.com)

**PACO**  
a brand of LMP

Follow Us:



LinkedIn



Facebook



Instagram

